

# Combining thermophilic aerobic reactor (TAR) with mesophilic anaerobic digestion (MAD) improves the degradation of pharmaceutical compounds

I. Gonzalez-Salgado, L. Cavaillé, S. Dubos, E. Mengelle, C. Kim, M. Bounouba, Sébastien Pommier, E. Paul, Y. Bessiere

## ▶ To cite this version:

I. Gonzalez-Salgado, L. Cavaillé, S. Dubos, E. Mengelle, C. Kim, et al.. Combining thermophilic aerobic reactor (TAR) with mesophilic anaerobic digestion (MAD) improves the degradation of pharmaceutical compounds. Water Research, 2020, 182, 10.1016/j.watres.2020.116033 . hal-02899576

## HAL Id: hal-02899576 https://insa-toulouse.hal.science/hal-02899576v1

Submitted on 22 Aug2022

**HAL** is a multi-disciplinary open access archive for the deposit and dissemination of scientific research documents, whether they are published or not. The documents may come from teaching and research institutions in France or abroad, or from public or private research centers. L'archive ouverte pluridisciplinaire **HAL**, est destinée au dépôt et à la diffusion de documents scientifiques de niveau recherche, publiés ou non, émanant des établissements d'enseignement et de recherche français ou étrangers, des laboratoires publics ou privés.



Distributed under a Creative Commons Attribution - NonCommercial 4.0 International License

### 1 Combining Thermophilic Aerobic Reactor (TAR) with Mesophilic Anaerobic Digestion

2 (MAD) improves the degradation of pharmaceutical compounds.

3 I. Gonzalez-Salgado\*, L. Cavaillé\*\*, S. Dubos\*, E. Mengelle\*, C. Kim\*, M. Bounouba\*, E.

- 4 Paul\*, S. Pommier\*, Y. Bessiere\*
- 5 \* TBI, Université de Toulouse, CNRS, INRAE, INSA, Toulouse, France (e-mail :
  6 yolaine.bessiere@insa-toulouse.fr)
- 7 \*\* Univ Toulouse, INPT, UPS, Lab Genie Chim, 4 Allee Emile Monso, F-31432 Toulouse,
- 8 France (e-mail: laetitia.cavaille@gmail.com)

## 9 Abstract:

10 The removal efficiency of nine pharmaceutical compounds from primary sludge was 11 evaluated in two different operating conditions: (i) in conventional Mesophilic Anaerobic 12 Digestion (MAD) alone and (ii) in a co-treatment process combining Mesophilic Anaerobic 13 Digestion and a Thermophilic Aerobic Reactor (MAD-TAR). The pilot scale reactors were 14 fed with primary sludge obtained after decantation of urban wastewater. Concerning the 15 biodegradation of organic matter, thermophilic aeration increased solubilization and hydrolysis yields of digestion, resulting in a further 26% supplementary removal of chemical 16 17 oxygen demand (COD) in MAD-TAR process compared to the conventional mesophilic 18 anaerobic digestion. The highest removal rate of target micropollutants were observed for 19 caffeine (CAF) and sulfamethoxazole (SMX) (>89%) with no substantial differences between 20 both processes. Furthermore, MAD-TAR process showed a significant increase of removal 21 efficiency for oxazepam (OXA) (73%), propranolol (PRO) (61%) and ofloxacine (OFL) 22 (41%) and a slight increase for diclofenac (DIC) (4%) and 2 hydroxy-ibuprofen (2OH-IBP) (5%). However, ibuprofen (IBP) and carbamazepine (CBZ) were not degraded during both
processes. Anaerobic digestion affected the liquid-solid partition of most target compounds.
Sorbed fraction of pharmaceutical compounds on the sludge tend to decrease after digestion,
this tendency being more pronounced in the case of the MAD-TAR process due to much
lower concentration of solids.

28 Keywords: pharmaceutical compounds; Thermophilic Aerobic Reactor; Mesophilic
29 Anaerobic Digestion; reduction of sludge production

## 30 Nomenclature

COD	Chemical Oxygen Demand
$COD_P$	Particulate COD
$COD_S$	Soluble COD
$COD_T$	Total COD
DS	Digested Sludge
$K_d$	Solid-liquid partition coefficient
OLR	Organic Loading Rate
PS	Primary Sludge
SRT	Sludge Retention Time
TSS	Total Suspended Solids
VSS	Volatile Suspended Solids
WWTPs	Wastewater Treatment Plants

31

## 32 **1. Introduction**

33 Over the last twenty years, various studies have quantified concentrations and occurrences of 34 pharmaceutical compounds in wastewater treatment plants (WWTPs). Data reported generally 35 refers to the removal from aqueous phase without distinguishing between sorption of 36 compounds onto sludge and/or biodegradation processes (Verlicchi et al. 2012). However, a 37 significant fraction of pollutants can be sorbed onto the sludge, depending on the respective physicochemical properties of molecules and sludge as well as on operating conditions. The 38 39 main mechanisms for the removal of organic compounds from wastewater are sorption and 40 biodegradation. Volatilization mechanism could be neglected due to small Henry's law 41 constants of most pharmaceutical compounds (Joss et al. 2006).

Sorption onto sludge follows two mechanisms: absorption and adsorption. On the one hand, hydrophobic interactions (absorption) occurs between the aliphatic and aromatic groups of a compound with the lipophilic cell membrane of the microorganisms or the lipid fractions of the suspended solids. On the other hand, the electrostatic interactions (adsorption) take place because of interactions of positively charged groups of chemicals with the negatively charged surfaces of the microorganisms (Verlicchi et al. 2012).

In this study, we considered nine molecules based on their variety of physicochemical properties, their prevalence in WWTP effluents, their uses for different pathologies and as a marker of human activity. These criteria led us to choose carbamazepine CBZ (anticonvulsant); diclofenac DIC, ibuprofen IBP and 2-hydroxyibuprofen 2OH-IBP (analgesics); sulfamethoxazole SMX and ofloxacin OFL (antibiotics); propranolol PRO (beta bloquer); oxazepam OXA (psycholeptic) and caffeine CAF (stimulant). Table S1 shows their therapeutic class, chemical structure, Henry's Law constant, pK<sub>a</sub> and LogK<sub>ow</sub> values. It can be noticed that Besse et al. (2008) included ofloxacin, propranolol, carbamazepine,
sulfamethoxazole and diclofenac in their preliminary risk assessment of pharmaceuticals
showing high Risk Quotient ratios.

58 One extended approach to evaluate the sorption of hydrophobic substances is the octanol-59 water partition coefficient K<sub>OW</sub> that indicates the lipophilicity of the sorbed compound. 60 However, some studies revealed that sorption behavior present significant deviations from log K<sub>OW</sub> for pharmaceuticals (Golet et al. 2003; Urase et al. 2005; Carballa et al. 2008; 61 Kümmerer 2009) indicating that polar and ionic interactions contribute to sorption behavior. 62 63 Overall, phase distribution of a pollutant depends on the physicochemical properties of the 64 molecule such as stereo chemical structure, pKa, solubility, polarity or log K<sub>OW</sub> and the 65 external conditions, including pH, redox potential and temperature (Kümmerer 2009). Finally, solid-liquid partition coefficient K<sub>d</sub> provides distribution behavior of the compounds between 66 67 liquid and solid phases.

68 Few authors have studied solid-liquid coefficient during anaerobic digestion. Table 1 69 summarizes K<sub>d</sub> coefficients found in literature for primary sludge. Ofloxacin and propranolol 70 have the highest expected sorption potential while ibuprofen and caffeine have the lowest one. 71 The rest of the molecules would be distributed in relatively same percentages in liquid and 72 solid phases. As we will discuss in 3.3 section, K<sub>d</sub> is not enough to evaluate the distribution of the molecules, Total Suspended Solids (TSS) concentration should be added for a complete 73 74 characterization. However, K<sub>d</sub> can help to compare qualitatively the sorption of target 75 molecules in sludge when determined in the same conditions.

Anaerobic digestion process involves hydrolysis, acidogenesis, acetogenesis and
methanogenesis phases. Generally, the hydrolysis of organic matter is considered as the
limiting step in anaerobic digestion (Nguyen et al. 2018; Chen et al. 2020).

Various thermal, chemical and enzymatic processes are known to improve the removal of recalcitrant organic matter (Paul et al. 2012). Among all these processes, micro-aeration has drawn attention in recent years because of its positive impacts as enhancing hydrolysis, dealing with overloads (Ramos and Fdz-Polanco, 2013) or enhancing biogas quality by reducing the concentrations of H<sub>2</sub>S (Díaz et al., 2010; Giordano et al., 2019). Aeration could be implemented intermittently or continuously in different stages of anaerobic digestion, as pre-treatment, co-treatment or post-treatment (Nguyen and Khanal, 2018).

As pre-treatment, Johansen and Bakke, (2006) found a positive effect on the hydrolysis of 86 87 proteins and carbohydrates during anaerobic digestion of primary sludge. Montalvo et al., 88 (2016) found an increase of protein and total sugars solubilization, COD<sub>s</sub> and methane 89 production associated to a 27% COD removal increase. Charles et al., (2009) observed 90 cellulase and protease activities after aeration pre-treatment of organic fraction of municipal 91 solids waste, confirming the hydrolytic capacities of exo-enzymes excreted by aerobic 92 bacteria. Three full-scale systems have implemented microaeration in anaerobic digestion 93 with positive effects in H<sub>2</sub>S removal (Kobayashi et al. 2012; Jeníček et al. 2017; Giordano et 94 al. 2019).

As post-treatment, 47 % of COD removal in MAD and 28% in TAR was obtained in a system
formed by two stages MAD/TAR (MAD followed of TAR, without recirculation) (Park et al.
2014).

As co-treatment, micro-aeration has also shown positive effects, Xu et al., (2014) studied the effect of intermittent micro-aeration rates of anaerobic digestion of food waste. They concluded that adequate micro-aeration rate can enhanced the hydrolysis of solid organic waste and methane yield by 16.9% and 18%, respectively.

102 Thermophilic aerobic treatment coupled to conventional mesophilic digestion, as a co-103 treatment, has not been yet extendedly studied. Compare to a single mesophilic digestion, 104 coupled process can get an additional solid removals and COD solubilisation (Dumas et al., 105 2010; Park et al., 2014; Fu et al., 2015). Fu et al., (2015) improved the methane yield and 106 enhanced the hydrolysis step in the digestion of corn straw by microaeration pre-treatment at 107 thermophilic temperature (55° C). With TAR as a co-treatment, Dumas et al., (2010) obtained 108 a 30% supplementary increase of COD removal in lab-scale Mesophilic Anaerobic combined 109 with a Thermophilic Aerobic Reactor (MAD-TAR) treating secondary sludge.

Anaerobic digestion is the most widely used method for treating (with valorisation) sludge produced in WWTPs (Gherghel et al., 2019) and the evaluation of the degradability of pharmaceutical molecules during digestion may be a key point to evaluate the ecotoxicological risks of digestate disposal. Table S2 summarizes the concentration of target micropollutants found in the literature during mesophilic anaerobic digestion and thermophilic anaerobic digestion (TAD). Some of molecules as IBP and OFL still had a high concentration in sludge after MAD.

The additional reduction of organic matter expected during coupled MAD-TAR digestion could be critically important as treatment of sludge represents approximately 50% of the total running cost of WWTPs (Gherghel et al., 2019). Although various studies have investigated the fate of pharmaceutical compounds in the anaerobic digestion (Carballa et al. 2007; Narumiya et al. 2013; Samaras et al. 2013; Malmborg et al. 2015; Martín et al. 2015;
Gonzalez-Gil et al. 2016; Gonzalez-Gil et al. 2017), removal of some persistent
micropollutants remains contradictory, i.e. removal of CBZ was reported from 85%
(Malmborg et al. 2015) to <0 % (M. Narumiya et al. 2013). In addition, their behaviour under</li>
thermophilic digestion has been little studied and never for a co-treatment such as MAD-TAR
though it gives very promising results.

In this work, the degradation of nine selected compounds (caffeine, ofloxacin, sulfamethoxazole, propranolol, carbamazepine, oxazepam, diclofenac, ibuprofen and 2 hydroxy-ibuprofen) and their sorption behavior was evaluated in a pilot-scale system. A QuEChERS-based method was modified to analyse targeted molecules in aqueous and total daily-composite samples attempting a mass balance of the compounds in the system. Conventional mesophilic anaerobic digestion (MAD) was compared to a system coupling a thermophilic aerobic reactor with MAD (MAD-TAR).

## 134 **2. Material and Methods**

#### 135

#### 2.1. Analytical standards and reagents

136 Analytical standards of  $\geq 98\%$  purity of nine selected molecules were purchased from Sigma– 137 Aldrich (Saint Quentin Fallavier, France), with the exception of oxazepam and IS for 138 ofloxacin, propranolol, sulfamethoxazole, oxazepam and 2OH-ibuprofen that were furnished 139 by Alsachim (Illkirch Graffenstaden, France). All compounds were supplied in powder except 140 IS for caffeine and carbamazepine were obtained as methanolic solution at a concentration of 141 1 mg/mL and 100 µg/mL, respectively. 142 Tri-sodium citrate dihydrate (Na<sub>3</sub>Cit, 2H<sub>2</sub>O) and disodium sulfate (Na<sub>2</sub>SO<sub>4</sub>) were obtained 143 from Sigma–Aldrich. The LC-MS–grade solutions used, including methanol (MeOH), 144 acetonitrile (ACN), formic acid and acetic acid (AA) were obtained from VWR Prolabo 145 (Fontenay-sous-Bois, France) as well as the products ethylenediaminetetraacetic acid 146 disodium salt dihydrate (Na<sub>2</sub>EDTA, 2H<sub>2</sub>O), citric acid monohydrate (Cit, 1H<sub>2</sub>O), primary 147 secondary amine (PSA) and C18 adsorbents (SUPELCO).

148

## 2.2. Anaerobic digesters

149 Biodegradation of the nine molecules was evaluated in two different configurations: (i) a 150 conventional mesophilic anaerobic digestion (MAD) and (i) Mesophilic Anaerobic Digestion 151 combined with a thermophilic aerobic reactor as a co-treatment process (MAD-TAR). The 152 MAD was a stirred tank reactor with an effective volume of 260 L equipped with an agitator 153 and a double jacket. The TAR, with a liquid volume of 40 L, was also equipped with an 154 agitator and a double jacket. The aeration was operated discontinuously in the TAR 155 compartment to provide a dissolved oxygen concentration, measured by VisiFerm<sup>™</sup> DO 156 optical sensor (Hamilton) between 0.2 and 0.5 mg L<sup>-1</sup> with an air flowrate of 300 L h<sup>-1</sup>. MAD was connected to the TAR by means of an ALBIN peristaltic recirculation pump (type 157 ALH15). Its flow rate was fixed at 100 L h<sup>-1</sup> and 15 L were recirculated from one 158 159 compartment to the other three times per day corresponding to a retention time of 0.9 days in 160 the TAR. The two compartments were heated by two independent cryostats in order to 161 maintain the temperatures suitable for aerobic thermophilic (60 °C) and anaerobic mesophilic 162 (35 °C) processes. For the MAD campaign, the 40 L compartment was maintained at 35°C 163 without aeration to be in fully MAD conditions while maintaining all other operating 164 conditions similar. Biogas composition (CH<sub>4</sub>, CO<sub>2</sub> and O<sub>2</sub>) in MAD outlet was measured 165 online (X-Stream X2GP continuous gas analyzer).

After inoculation by the secondary sludge from Cugnaux WWTP, the digester was fed with 166 primary sludge from our pilot-scale settling tanks. Digester was operated semi-continuously 167 168 by feeding the primary sludge automatically once a day. The duration of feeding, withdrawal 169 and recirculation from MAD to TAR were adjusted to maintain a total sludge retention time 170 (SRT) of around 20 days and a residence time in the TAR of 0.9 day. MAD and MAD-TAR 171 campaigns were carried out in two consecutive years, between February and April, in order to 172 have the same type of seasonality in medication intake. The Organic Loading Rate (OLR) was 1.2 kg<sub>COD</sub> m<sup>-3</sup> day<sup>-1</sup> during MAD and 0.9 kg<sub>COD</sub> m<sup>-3</sup> day<sup>-1</sup> during MAD-TAR campaign. 173

174

## 2.3. Sampling and analytical techniques

To evaluate the performances of the two studied processes, daily-composite samples of primary and digested sludge were collected regularly during steady-state periods. Sludge samples were stored at 4 °C and analyzed on the same day. In addition, aliquots of the total and dissolved fractions (obtained after 4500 g centrifugation for 15 minutes) were stored at -20 °C for micropollutants analysis. The sludge and the supernatants were characterized by Total Suspended solids (TSS), Volatile Suspended Solids (VSS) and Chemical Oxygen Demand (COD).

For quantification of targeted micropollutants, a QuEChERS-based modified method followed by UHPLC-MS-MS was performed both on total and aqueous samples. The protocol consisted in introducing 2.5 mL of real matrices in a 50 mL polypropylene (PP) Falcon tube (Falcon tubes from VWR Scientific Products). Quantification of the target analytes was performed by the internal standard approach, thus a volume of 0.2 mL of IS solution at 300 ng  $L^{-1}$  was spiked to samples. The PP tubes was left for 2 h on a shaking table to ensure the homogeneity of the sample, and more importantly the adsorption of the IS on the sludge.

Under slow stirring, 1.25 mL of EDTA, 1.25 mL of citrate buffer (232 g L<sup>-1</sup> Na<sub>3</sub>Cit, 2H<sub>2</sub>O and 189 190 115.2 g L<sup>-1</sup> Cit, 1H<sub>2</sub>O), 5 mL of acidified ACN and 4 g of Na<sub>2</sub>SO<sub>4</sub> are added in tubes that are 191 immediately vortexed (Heidolph<sup>TM</sup> Multi Reax Vortex Mixer from Fisher Scientific) at 192 maximum speed for 1 min and then centrifuged at 7,100 g for 5 min. The entire organic phase 193 was transferred to a 15 mL Falcon tube containing 0.075 g of sorbents (PSA and C18 in ratio 194 1/1) and immediately vortexed at maximum speed for 1 min and then centrifuged at 7,100 g 195 for 5 min. The purified organic phase was then recovered in Pyrex tubes and evaporated under 196 reduced pressure for 7 h at 45°C using the Low BP program of the EZ-2 Envi evaporator 197 system (Genevac). A volume of 1 mL of a solution of ACN/water 95/5 (v/v) was added and pyrex tubes were vortexed at maximum speed for 1 min. The liquid was filtered through a 0.2 198 199 µm membrane (Minisart RC 15, Sartorius, France) and transferred in vials before analysis.

200 Liquid chromatography was carried out using an Ultimate 3000 UHPLC System from Dionex 201 (France). Sample aliquots (10µL) were injected onto an ACQUITY UPLC HSS (High 202 Strength Silica) T3 (100 mm x 2.1 mm, 1.8µm) column from Waters. Column oven 203 temperature was maintained at 35°C and flow rate was 0.6 mL min<sup>-1</sup>. For the positive 204 ionization, the mobile phase was composed of solvent 1 (HCOOH 0.1% in pure water) and 205 solvent 2 (HCOOH 0.1% in ACN) with the gradient as follows: 0-0.5 min 95/5, 0.5-7 min 206 95/5 to 0/100, 7-8 min 0/100, 8-8.2 min 0/100 to 95/5 and 8.2-9.5 min 95/5 (ratios expressed 207 as 1/2 ratios). For the negative ionization, the solvents 1 and 2 are pure water and ACN, 208 respectively. Detection was achieved with an Applied Biosystems Sciex QTRAP® hybrid 209 linear ion-trap triple quadrupole mass spectrometer (Foster City, USA) equipped with a 210 Turbolon-Spray Interface. The instrument was operated in ElectroSpray (ESI) positive (+) or 211 negative (-) in Multiple Reaction Monitoring (MRM) mode (dwell time, 80 ms). Details of 212 analytical conditions are presented in supplementary information (Table S3). Performance

213 characteristics of the method were evaluated by accuracy and precision on total fraction of 214 primary sludge and digestate. Method accuracy (estimated by means of relative recovery (RR) 215 experiments) and precision (expressed as intra-day repeatability in terms of relative standard 216 deviation (RSD)) were studied by spiking samples at different concentrations according to the 217 concentration levels found in real samples. RR of the analytes ranged within 90%-120% and 218 the intra-day RSD values were found to be lower than 20% indicating a satisfactory accuracy 219 and precision. For all matrixes (primary sludge and digestate, total and liquid fractions), limit 220 of detection (LD) was calculated according to the EPA's method by considering 3 times the 221 standard deviation determined by analyzing 8 blank samples or spiked samples at low levels 222 when it is necessary. Therefore, it is a robust and reliable method for complex and simple 223 matrices which makes it possible to study the performances of the MAD and MAD-TAR 224 processes. For each campaign, 13 samples were taken and analyzed in duplicate by adding 225 internal standards for each targeted molecule targeted prior to extraction. For each samples 226 and analytes, standard deviations of less than 10% were obtained.

227

## 2.4. Calculations

## 228 Mass balances and pharmaceuticals removal

Because of the discontinuous feed and withdrawal (one per day) and the variation of concentrations in primary sludge, all the data were cumulated for calculations. When a stationary state is reached, a straight line must be obtained when representing  $\Sigma m_{outlet} = f$ ( $\Sigma m_{inlet}$ ). The obtained slope allowed to calculate the removal efficiency of the compound ( $\eta_{removal} = (1\text{-slope}) \times 100$ ). This method was applied for VSS, COD and micropollutants. Statistical analysis was carried out following (Sperling et al., 2020) recommendations. Linearity of the regression was confirmed for all parameters by ensuring that the linear model was satisfying the assumptions of linearity, independence, normality of residuals and homogeneity of variances. Furthermore, calculations of the 95% confidence interval of the slope of linear model obtained for MAD and MAD-TAR campaign allowed evaluating if performances were significantly different (not overlap of the confidence interval). This analysis was performed with R software.

241 Distribution of target molecules between solid and liquid phases of sludge

Solid-liquid partition coefficient K<sub>d</sub> (L kg<sub>TSS</sub><sup>-1</sup>) of target molecules in sludge and supernatants
of each sample was calculated as:

244 
$$K_{d,i} = \frac{C_{i,sorbed}}{C_{i,liquid}} = \frac{\left(\frac{C_{i,total} - C_{i,supernatant}}{V_{total}}\right) / TSS}{C_{i,supernatant}}$$
eq. 1

Where  $C_{i,sorbed}$  and  $C_{i,liquid}$  are the solid ( $\mu g \ kg_{TSS}^{-1}$ ) and liquid ( $\mu g \ L^{-1}$ ) concentrations of molecule *i*, respectively.  $C_{i,total}$  is the total concentration of molecule i in the sludge ( $\mu g \cdot L^{-1}$ ) and  $C_{i,supernatant}$  is the supernatant concentration of molecule i ( $\mu g \cdot L^{-1}$ ) in the liquid phase after centrifugation of the sludge.  $V_{supernatant} / V_{total}$  is the ratio of the supernatant and total volumes after centrifugation.

The amount of compound *i* in the liquid phase in function of log  $K_d$  value for the range of TSS sludge concentrations was assessed as:

252 
$$100 - \frac{C_{i,sorbed}}{C_{i,total}} = \frac{K_{d,i} \cdot TSS}{1 + K_{d,i} \cdot TSS}$$
eq. 2

253 Oxygen consumption in TAR reactor.

In order to evaluate the fate of organic matter (i.e. removal in aerobic or anaerobic conditions), the oxygen uptake rate (OUR) in the TAR was calculated from the decrease of the dissolved oxygen concentration ( $C_{O2}$ ) during non-aerated periods.

$$257 OUR = -\frac{dC_{O2}}{dt} eq. 3$$

**3. Results** 

**3.1. Start-up and operation** 

Although the feeding showed fluctuations, as can be expected when working with real influent, the VSS and  $COD_t$  concentrations after digestion remained constant with standard deviation below 4%. Considering comparable operating conditions (see Table 2), higher elimination of solid organic matter was achieved in the hybrid MAD-TAR system (around 76% for VSS) compared to the mesophilic one (around 47%) confirming lab results obtained a few years ago (Dumas et al. 2010).

During MAD-TAR campaign, COD balances were performed to estimate the fate of 266 267 transformed COD. Collected grab samples at the inlet and outlet of the TAR compartment 268 allowed estimating that 26.6% of the total removed COD was eliminated in this thermophilic 269 compartment. The additional COD removal compared to MAD campaign being eliminated in 270 the aerated compartment, no additional methane recovery in the MAD compartment was allowed. Furthermore, the average OUR in the TAR was  $7.5 \pm 0.8 \text{ mgO}_2 \text{ L}^{-1} \text{ h}^{-1}$  that 271 272 corresponds only to 3.9% of the total removed COD that was degraded in aerobic conditions. 273 Even if volatilization of certain substances such as volatile fatty acids could occur, this 274 observation tends to show that the thermophilic condition could have more effect than the 275 aeration. Two main mechanisms could be associated with this temperature effect. On the one hand, the microbial activity could be directly positively affected. Indeed, several authors reported a significant increase in hydrolysis rate in thermophilic compared to mesophilic conditions (Siegrist et al. 2002; Lynd et al. 2002). Ge et al. (2011) even demonstrated that this rate strongly follow the Arrhenius relationship, with nearly a doubled value when increasing the temperature by 20°C. On the other hand, temperature may play a role in physical phenomena, in particular on mass transfer and solubility even if their effect on the rate of microbial utilization remains to confirm (Lynd et al. 2002).

283

## 3.2. Fate of pharmaceutical compounds during anaerobic digestion

The total concentration ( $\mu g L^{-1}$ ) of the nine selected compounds is illustrated in Figure 1 for 284 285 both primary sludge and digestate from MAD (Figure 1a) and MAD-TAR (Figure 1b) 286 processes. All the target molecules were detected and quantified in the primary sludge (see 287 Table S4 for limit of detection). Even if some variations in the concentrations have been 288 observed between the two experimental campaigns (-23% in average during the MAD-TAR 289 experiment) the order of magnitude were the same, allowing for a relevant comparison of 290 performances between the two operating conditions. The highest concentrations of targeted 291 compounds were observed for OFL and CAF (more than 40  $\mu$ g L<sup>-1</sup>) while medium to low 292 concentrations were reported for SMX, CBZ, PRO, DIC, OXA, IBP and 2OH-IBP, around 293 1.0-10.0 µg L<sup>-1</sup>.

The comparison of removal efficiencies in MAD and MAD-TAR are reported in Figure 2. Compounds placed above the dotted line show better removal efficiency by the innovative process (MAD-TAR) compared to conventional process (MAD).

The highest removal yields were obtained for CAF and SMX (>89%) with slight increase in MAD-TAR campaign for CAF, but with no significant differences between both processes for 299 SMX. The removal of several other target compounds was significantly improved by MAD-300 TAR process. Moderate removal ranging between 54% and 75% were observed for OFL and 301 OXA respectively in MAD-TAR compared to only 9% and 49% in MAD. Moreover, while PRO was not removed at all during MAD process, a rate of 69% was achieved in MAD-TAR. 302 303 DIC and 20H-IBP presented low removal during MAD-TAR (6-10%) while they were 304 accumulated in MAD. Finally, a negative removal rate was observed for IBP and CBZ in both processes, MAD (-30% and -71%, respectively) and MAD-TAR (-35% and -91%), 305 306 underlining that concentrations were higher in the digestate than in primary sludge.

In MAD conditions, similar removal efficiencies were reported in the literature for OFL, PRO
(Narumiya et al. 2013), CAF (Narumiya et al. 2013) and SMX (Carballa et al. 2007;
Narumiya et al. 2013; Alvarino et al. 2014; Falas et al. 2016; Lakshminarasimman et al.
2018).

311 Ibuprofen is generally well removed under aerobic conditions (Alvarino et al. 2018) but the 312 removal under anaerobic conditions remained controversial. Carballa et al. (2007); Martín et 313 al. (2012); Samaras et al. (2013) showed a moderately-high removal, but recent studies found 314 a recalcitrant behaviour after anaerobic processes (Alvarino et al. 2014; Phan et al. 2018) as 315 underlined in our results.

DIC is generally persistent with low removal efficiencies (Alvarino et al. 2014; Ghattas et al.
2017; Phan et al. 2018; L. Gonzalez-Gil et al. 2019) whereas, moderate removal was showed
in some lab-scale data (Carballa et al. 2007; Malmborg et al. 2015). CBZ is also recalcitrant in
wastewater treatments, low or negligible removal was reported in the studies of (Ghattas et
al. 2017; Alvarino et al. 2018; Lakshminarasimman et al. 2018; Phan et al. 2018; Kent et al.
2019).

15

Redox conditions played an important role conditioning the development of microbial populations and thus on biodegradation pathways thanks to the complementary hydrolytic capacities of external enzymes excreted by thermophilic aerobic bacteria. Some molecules are only degraded under specific aerobic, anaerobic or both conditions. Stadler et al. (2015) and Alvarino et al. (2018) studied the influence of redox potential in the removal of organic compounds, showing that in the case of SMX the microaerobic conditions increased their removal.

329 Phan et al. (2018) reported that molecules containing only electron donating functional groups 330 (-NH<sub>2</sub>, -OH, -CH<sub>3</sub>, -OCH<sub>3</sub>...) in their structure are more susceptible to biodegradation, as is the case of SMX. In anaerobic digestion. Ghattas et al. (2017) proposed a degradation 331 332 pathway via reduction of the electron withdrawing sulfonyl group. In the case of IBP, this 333 molecule contains three electron donating functional groups and it should be biotransformed 334 but it remains recalcitrant after anaerobic digestion, maybe because their substitutions in their 335 aromatic ring. In the case of DIC, a possible pathway could be the reductive dichlorination 336 (Phan et al. 2018) or a biodegradation catalysed by decarboxylases or acetate kinases 337 (Gonzalez-Gil et al. 2019). Concerning SMX, they reported that most probably pathway was 338 the abiotic reduction of the Ne-O bond mediated by microbial reaction. About DIC, they 339 proposed that their biodegradation may be catalysed by decarboxylases or acetate kinases 340 (Gonzalez-Gil et al. 2019).

Microaeration on anaerobic digestion affects microbial communities by increasing the diversity and activity of hydrolytic and fermentative microorganisms (Nguyen et al. 2018; Chen et al. 2020). Comparing microaeration to strict anaerobic condition, an increase of phylum Firmicutes (class Clostridia), which is related to hydrolysis step was found. In addition, microaeration also affects the methane-producing archaea presented in anaerobic digestion: Methanosarcina, slightly aerotolerant, and Methanobacterium both doubled (Fu et
al., 2016). Cometabolism is considered the main mechanism of pharmaceutical degradation
during biological wastewater treatments (Gonzalez-Gil et al., 2017). Further research is
necessary to understand the degradation pathway attributed to co-metabolism during hybrid
digestion process and the additional degradation of some targeted micropollutants during
MAD-TAR.

352 Therefore, MAD-TAR process allows the exposure of compounds to different redox and temperature conditions improving significantly the removal efficiency of OXA, PRO and 353 354 OFL and slightly DIC and 2OH-IBP concomitantly with the improvement of overall organic 355 matter degradation. These are very positive results considering the ecotoxicological risks of 356 OXA, PRO and OFL as underlined by Besse et al. (2008). However, IBP and CBZ even show 357 more negative efficiencies and the mechanisms involved need further investigations. The 358 negative removal or apparent production of some molecules have already been reported in the 359 literature, explained by the transformation back of their metabolites to their parent 360 compounds. Indeed, parent chemicals are often excreted from the human body with a number 361 of associated metabolites. In the case of IBP, it is excreted as the unchanged drug in 1% and 362 76% as metabolites (Petrie et al. 2015). There is a general lack of data about metabolite 363 concentrations and biotransformation during wastewater treatments but some authors reported higher metabolites concentrations than parent compound in urban wastewater for IBP 364 365 (Brezinova et al. 2018). In the case of CBZ, the negative removal or apparent production was 366 also reported (Narumiya et al. 2013; Falas et al. 2016). He et al. (2019) reported the 367 quantification of some phase I and phase II metabolites of CBZ showing that CBZ Nglucuronide (CBZ-Glu) concentration (59.4 ng L<sup>-1</sup>) was higher than CBZ (53.8 ng L<sup>-1</sup>) in 368 369 wastewater influent from Kyoto WWTP (Japan). In their effluent, CBZ concentration increased by 15% and CBZ-Glu decreased by 19%. They attributed the increase of CBZ to the
deconjugation of CBZ-Glu. Further research is needed to confirm this hypothesis in IBP and
CBZ as some metabolites may be biologically active and have similar pharmacological
activity than parent compound (Besse et al. 2008).

## 374 **3.3. Partitioning pharmaceutical compounds**

375 Considering the possible relation between sorption on solids and inaccessibility for 376 biodegradation, distribution of compounds was studied based on measured concentration in 377 total and soluble phases, as described in section 2.4. From eq. 1, it is obvious that a single 378 value of log K<sub>d</sub> is not enough to evaluate the partition of the compounds between solid and liquid phases and that this partitioning constant should be always given together with the TSS 379 380 concentration. Indeed, in the case of primary sludge of MAD campaign, which presented the 381 highest TSS concentration, a log K<sub>d</sub> value below 1.73 and 0.78 indicates that the percentage 382 of compound in the liquid phase is above 50% and 90%, respectively (Figure 3a). At the 383 opposite, when considering the lowest concentrated sludge, i.e. the digestate during MAD-384 TAR campaign log Kd values below 2.31 and 1.36 indicate a percentage above 50% and 90% 385 respectively (Figure 3b).

Thus, even if the partition coefficients were not greatly modified during digestion, the significant decrease in TSS in the MAD-TAR campaign leads to higher fractions in the liquid (Figure 3a) compared to the MAD campaign (Figure 3b).

The distribution of targeted compounds between the particulate and liquid phases are presented in Figure 4. Primary sludge presented similar sorption behavior for the two campaigns, OFL and PRO showed the highest sorption (>90%) followed by OXA (71%). IBP, SMX, DIC and CBZ range of 35-63%. Finally, a low sorption is found for 2OH-IBP 393 (20% and 24 %, MAD and MAD-TAR respectively %) and CAF (21 and 34 %, MAD and
394 MAD-TAR respectively).

The liquid fraction of SMX, 2OH-IBP and PRO increased slightly after digestion in MAD (3-5%) and moderately in MAD-TAR (11-19%); CBZ and OXA increased moderately in MAD (7%-13%) and significantly in MAD-TAR (27-39%); IBP and DIC increased significantly in MAD (23%-34%) and in MAD-TAR (22-28%). Only CAF presented a contradictory behaviour, liquid fraction increased in MAD-TAR (16%) and decreased in MAD (-8%). Only OFL showed no significant change in sorption after digestion, 0 and 2% in MAD and MAD-TAR, respectively.

402 As indicated in Table S5, for a same affinity constant, the fraction in liquid after digestion is 403 significantly different in MAD and MAD-TAR due to drastic changes in TSS. Indeed, the 404 suspended solid concentration dropped from  $18.5\pm3.4$  to  $11.7\pm0.5$  g L<sup>-1</sup> during the MAD 405 experiment and from  $15.4 \pm 2.1$  to  $4.8 \pm 0.7$  g L<sup>-1</sup> during the MAD-TAR campaign.

406 The difference in phase distribution after digestion can partly be attributed to the different pH 407 value of primary and digested sludge because of the presence of compounds containing 408 functional groups which can be protonated and deprotonated (Ternes et al. 2004). In function 409 of pH, the compound can be neutral, cationic, anionic or zwitterionic, consequently its 410 physical, chemical and biological properties may be affected (Verlicchi et al. 2012) by 411 inducing positively charged compounds, that are likely to interact with the negatively charged 412 surface of sludge, or at the contrary anions inducing hydrophilic behaviour (Alvarino et al. 413 2018).

Among the compounds mostly present in liquid phase after digestion (pH 7.5 in MAD - 7.4 in
MAD-TAR), IBP, 2OH-IBP and DIC have a carboxylic acid group (pKa = 4.15 - 4.63). For a 19

416 pH higher than pKa value, the fraction of anionic species increased. Initial pH of the primary 417 sludge was 6.1–6.2, after digestion of the organic matter, the pH increased resulting in an 418 increase of hydrophilicity of the compounds, in line with our results. For instance, in the case 419 of IBP, the liquid fraction in primary sludge was 65% (MAD) and 59% (MAD-TAR) and it 420 increased to 87% (MAD) and 92% (MAD-TAR) after digestion. Similar increase of liquid 421 partition was found in DIC and 2OH-IBP. The same partitioning behaviour was also expected 422 in SMX (pKa 1.8 and 5.6). At the range of pH in anaerobic digestion, the fraction of anionic 423 species should also increase due to the dissociation pathway of sulfonamides and 424 consequently an increase of hydrophilicity is likely to occur. Ma et al. (2015) confirmed in 425 their study of oxidation of SMX that the dissociation of SMX increases with increasing pH. 426 Consequently, deprotonated compounds were more readily to oxidation. In our study, 427 partition behaviour of SMX remained almost constant before and after digestion (liquid 428 fraction slightly increased 5-11%).

429 Among the compounds present mostly in solid phase, OFL has a zwitterion structure with a 430 basic amino group (pKa 9.28) and an acid carboxylic group (pKa 5.97). Between pH 6.0 and 431 9.3, cationic (protonated amino group), anionic (deprotonated carboxyl group) and zwitterion 432 species would be present. At pH of digestion (7.4-7.5), zwitterions should be dominant. In 433 accordance with Narumiya et al. 2013, due to the increase of zwitterionic species, the 434 hydrophobicity of OFL would also increase; this fact may explain the tendency to sorb. In our 435 study, sorption behaviour of OFL did not significantly change and remained at high level with 436 more than 99% of the molecule located in the particulate compartment. OXA is uncharged 437 under normal pH conditions (Svahn et al. 2015), it has also a zwitterion structure (pKa 1.55, 438 10.9). Between pH 6 and 11 zwitterion and anionic species would be predominant. With 439 increasing pH during digestion, anionic species would also increase, resulting in higher 440 hydrophilicity, in agreement with our results: the liquid fraction of OXA in primary sludge
441 was 28-29% (MAD and MAD-TAR) and it increased to 65-67% (MAD and MAD-TAR) after
442 digestion.

443 CAF (pKa 10.40) and PRO (pKa 9.42) are cationic species when pH is lower than pKa value 444 due to their protonated amino group. During the digestion, pH increased and the fraction of 445 cationic species would decrease in favour to their neutral conjugates. The increase in the 446 neutral fraction would decrease the hydrophilicity of the molecules and hence liquid fraction 447 would decrease (Narumiya et al. 2013). We found this behaviour for CAF during MAD 448 campaign, where the liquid fraction decreased from 79% in primary sludge to 70% after 449 digestion. However, liquid fraction of CAF increased after digestion in MAD-TAR campaign. 450 In the case of PRO, there were not a significant increase of hydrophilicity in MAD campaign 451 (liquid fraction only increased 3% after digestion) but the liquid fraction increased from 10% 452 in primary sludge to 22% after digestion during MAD-TAR experiment. Consequently, a 453 parameter other than pH influenced their solid-liquid partition during MAD-TAR campaign.

454 CBZ (pKa -3.8, 13.9) is a neutral compound and hence sorption should be governed by 455 hydrophobic interactions (Hai et al. 2018) without influence of pH (Urase et al. 2005; M. 456 Carballa et al. 2008). Svahn et al. (2015) also suggested that hydrophobic adsorption would 457 predominate because of the high apolar to polar surface ratio of the CBZ. According to our 458 results, liquid fraction of CBZ increased after digestion in MAD and MAD-TAR process and 459 hence a parameter other than pH should influence CBZ partitioning behaviour during 460 anaerobic digestion

When considering the compounds that suffered a biodegradation during digestion, results tendto show an improvement of biodegradation in MAD-TAR that may be associated with the

increase of the fraction in the liquid phase in the case of DIC, OXA and 2-OH IBP (Figure 5). 463 464 The increase of the removal of OFL and PRO may be linked to the increase of solid reduction 465 in MAD-TAR because of the fact that these molecules are largely sorbed in solids. Indeed, the concentration of solids in MAD-TAR decrease down to 4.9 mg L<sup>-1</sup> compared to 11.7 mg L<sup>-1</sup> 466 467 in MAD campaign resulting in an increased availability of compounds in the liquid phase. 468 SMX and CAF are widely removed in MAD and MAD-TAR campaigns, so a clear link 469 between liquid fraction and removal cannot be established. Furthermore, liquid fraction of 470 IBP decreased and CBZ increased during MAD-TAR campaign and both components showed 471 more negative efficiencies during this campaign. Thus, bioavailability cannot be the only 472 mechanism driving the biodegradation and reversibility of the biological reactions has to be 473 considered.

#### 474 Conclusions

475 The removal efficiency of nine pharmaceutical compounds in conventional Mesophilic 476 Anaerobic Digestion (MAD) was compared with Mesophilic Anaerobic Digestion combined 477 with a Thermophilic Aerobic Reactor (MAD-TAR). In addition to a significant improvement in the degradation of solid organic matter (76% vs 47% for MAD-TAR and MAD 478 479 respectively), interesting results were also obtained on the targeted compounds. Moderate 480 (DIC, 2OH-IBP) to high (OXA, PRO, OFL) improvement of removal was observed in MAD-481 TAR while removal higher than 90% was found for CAF and SMX whatever the process. 482 Even if the mechanisms implied in the fate of IBP and CBZ need further investigation, hybrid 483 process MAD-TAR that combines two redox conditions (anaerobic and micro aeration) 484 presents a feasible alternative to improve not only the removal a wide number of pollutants, 485 but also overall organic matter degradation.

## 486 Acknowledgement

- 487 This work is part of the SMS project "Micropollutant Source Separation for health risks
- 488 control and preservation of the environment" funded by the Adour-Garonne Water Agency
- 489 and the French Agency for Biodiversity and of the project ANR Design (ANR- 17-CE22-
- 490 0017). We acknowledge C. Claparols from ICT for the UHPLC-MS-MS analysis.

#### 491 **References**

- Alvarino, T., S. Suarez, J. M. Lema, and F. Omil. 2014. 'Understanding the Removal Mechanisms of PPCPs and the Influence of Main Technological Parameters in Anaerobic UASB and Aerobic CAS Reactors'. *Journal of Hazardous Materials* 278 (August): 506–13. https://doi.org/10.1016/j.jhazmat.2014.06.031.
- Alvarino, T., S. Suarez, J. Lema, and F. Omil. 2018. 'Understanding the Sorption and Biotransformation of Organic Micropollutants in Innovative Biological Wastewater Treatment Technologies'. *Science of the Total Environment* 615 (February): 297–306. https://doi.org/10.1016/j.scitotenv.2017.09.278.
- Besse, J.P., C. Kausch Barreto, and J. Garric. 2008. 'Exposure Assessment of Pharmaceuticals
  and Their Metabolites in the Aquatic Environment: Application to the French Situation and
  Preliminary Prioritization'. *Journal of Human and Ecological Risk Assessment* 14 (4): 665–
  95. https://doi.org/10.1080/10807030802235078.
- Brezinova, T., J. Vymazal, M. Kozeluh, and L. Kule. 2018. 'Occurrence and Removal of
  Ibuprofen and Its Metabolites in Full-Scale Constructed Wetlands Treating Municipal
  Wastewater'. *Ecological Engineering* 120 (September): 1–5.
  https://doi.org/10.1016/j.ecoleng.2018.05.020.
- Carballa, M., G. Fink, F. Omil, J. M. Lema, and T. Ternes. 2008. 'Determination of the Solid–
  Water Distribution Coefficient (Kd) for Pharmaceuticals, Estrogens and Musk Fragrances in
  Digested Sludge'. *Water Research* 42 (1): 287–95.
  https://doi.org/10.1016/j.watres.2007.07.012.
- 512 Carballa, Marta, Francisco Omil, Thomas Ternes, and Juan M. Lema. 2007. 'Fate of
  513 Pharmaceutical and Personal Care Products (PPCPs) during Anaerobic Digestion of Sewage
  514 Sludge'. *Water Research* 41 (10): 2139–50. https://doi.org/10.1016/j.watres.2007.02.012.
- 515 Charles, W., L. Walker, and R. Cord-Ruwisch. 2009. 'Effect of Pre-Aeration and Inoculum on
  516 the Start-up of Batch Thermophilic Anaerobic Digestion of Municipal Solid Waste'.
  517 *Bioresource Technology* 100 (8): 2329–35. https://doi.org/10.1016/j.biortech.2008.11.051.

- 518 Chen, Qing, Wanqing Wu, Dacheng Qi, Yihong Ding, and Zihao Zhao. 2020. 'Review on
- 519 Microaeration-Based Anaerobic Digestion: State of the Art, Challenges, and Prospectives'.
- 520 Science of The Total Environment 710 (March): 136388.
- 521 https://doi.org/10.1016/j.scitotenv.2019.136388.
- Díaz, I., A. C. Lopes, S. I. Pérez, and M. Fdz-Polanco. 2010. 'Performance Evaluation of
  Oxygen, Air and Nitrate for the Microaerobic Removal of Hydrogen Sulphide in Biogas from
  Sludge Digestion'. *Bioresource Technology* 101 (20): 7724–30.
  https://doi.org/10.1016/j.biortech.2010.04.062.
- 526 Dumas, C., S. Perez, E. Paul, and X. Lefebvre. 2010. 'Combined Thermophilic Aerobic 527 Process and Conventional Anaerobic Digestion: Effect on Sludge Biodegradation and 528 Methane Production'. *Bioresource Technology* 101 (8): 2629–36. 529 https://doi.org/10.1016/j.biortech.2009.10.065.
- 530 Falas, P., A. Wick, S. Castronovo, J. Habermacher, T. A. Ternes, and A. Joss. 2016. 'Tracing 531 the Limits of Organic Micropollutant Removal in Biological Wastewater Treatment'. *Water*
- 532 *Research* 95 (May): 240–49. https://doi.org/10.1016/j.watres.2016.03.009.
- Fu, Shan-Fei, Fei Wang, Xian-Zheng Yuan, Zhi-Man Yang, Sheng-Jun Luo, Chuan-Shui
  Wang, and Rong-Bo Guo. 2015. 'The Thermophilic (55°C) Microaerobic Pretreatment of
  Corn Straw for Anaerobic Digestion'. *Bioresource Technology* 175 (January): 203–8.
  https://doi.org/10.1016/j.biortech.2014.10.072.
- Ge, H., P. D. Jensen, and D. J. Batstone. 2011. 'Relative Kinetics of Anaerobic Digestion
  under Thermophilic and Mesophilic Conditions'. *Water Science and Technology* 64 (4): 848–
  53. https://doi.org/10.2166/wst.2011.571.
- 540 Ghattas, A., F. Fischer, A. Wick, and T. A. Ternes. 2017. 'Anaerobic Biodegradation of
  541 (Emerging) Organic Contaminants in the Aquatic Environment'. *Water Research* 116 (June):
  542 268–95. https://doi.org/10.1016/j.watres.2017.02.001.
- 543 Gherghel, A., C. Teodosiu, and S. De Gisi. 2019. 'A Review on Wastewater Sludge 544 Valorisation and Its Challenges in the Context of Circular Economy'. *Journal of Cleaner* 545 *Production* 228 (August): 244–63. https://doi.org/10.1016/j.jclepro.2019.04.240.
- 546 Giordano, Andrea, Francesco Di Capua, Giovanni Esposito, and Francesco Pirozzi. 2019. 547 'Long-Term Biogas Desulfurization under Different Microaerobic Conditions in Full-Scale 548 Thermophilic Digesters Co-Digesting High-Solid Sewage Sludge'. International 549 **Biodeterioration** Å **Biodegradation** 142 (August): 131-36. 550 https://doi.org/10.1016/j.ibiod.2019.05.017.
- Golet, E. M., I. Xifra, H. Siegrist, A. C. Alder, and W. Giger. 2003. 'Environmental Exposure
  Assessment of Fluoroquinolone Antibacterial Agents from Sewage to Soil'. *Environmental Science & Technology* 37 (15): 3243–49. https://doi.org/10.1021/es0264448.
- Gonzalez-Gil, L., M. Carballa, and J. M. Lema. 2017. 'Cometabolic Enzymatic
   Transformation of Organic Micropollutants under Methanogenic Conditions'. *Environmental Science & Technology* 51 (5): 2963–71. https://doi.org/10.1021/acs.est.6b05549.

- 557Gonzalez-Gil, L., D. Krah, A. Ghattas, M. Carballa, A. Wick, L. Helmholz, J. M. Lema, and558T. A. Ternes. 2019. 'Biotransformation of Organic Micropollutants by Anaerobic Sludge559Enzymes'. Water Research 152 (April): 202–14.560https://dxi.org/10.1016/j.metrus.2018.12.064
- 560 https://doi.org/10.1016/j.watres.2018.12.064.
- Gonzalez-Gil, L., M. Papa, D. Feretti, E. Ceretti, G. Mazzoleni, N. Steimberg, R. Pedrazzani,
  G. Bertanza, J. M. Lema, and M. Carballa. 2016. 'Is Anaerobic Digestion Effective for the
  Removal of Organic Micropollutants and Biological Activities from Sewage Sludge?' *Water Research* 102 (October): 211–20. https://doi.org/10.1016/j.watres.2016.06.025.
- Gonzalez-Gil, Lorena, Miguel Mauricio-Iglesias, Denisse Serrano, Juan M. Lema, and Marta
  Carballa. 2017. 'Role of Methanogenesis on the Biotransformation of Organic
  Micropollutants during Anaerobic Digestion'. *The Science of the Total Environment* 622–623:
  459–66. https://doi.org/10.1016/j.scitotenv.2017.12.004.
- Hai, F., S. Yang, M. Asif, V. Sencadas, S. Shawkat, M. Sanderson-Smith, J. Gorman, Z. Xu,
  and K. Yamamoto. 2018. 'Carbamazepine as a Possible Anthropogenic Marker in Water:
- 571 Occurrences, Toxicological Effects, Regulations and Removal by Wastewater Treatment
- 572 Technologies'. Water 10 (2): 107. https://doi.org/10.3390/w10020107.
- 573 He, K., T. Yonetani, Y. Asada, S. Echigo, and S. Itoh. 2019. 'Simultaneous Determination of
- 574 Carbamazepine-N-Glucuronide and Carbamazepine Phase I Metabolites in the Wastewater by
- 575 Liquid Chromatography-Tandem Mass Spectrometry'. *Microchemical Journal* 145 (March): 576 1101 08 https://doi.org/10.1016/j.microa.2018.12.014
- 576 1191–98. https://doi.org/10.1016/j.microc.2018.12.014.
- 577 Jeníček, P., J. Horejš, L. Pokorná-Krayzelová, J. Bindzar, and J. Bartáček. 2017. 'Simple 578 Biogas Desulfurization by Microaeration - Full Scale Experience'. *Anaerobe* 46 (August): 579 41 45 https://doi.org/10.1016/j.engengha.2017.01.002
- 579 41–45. https://doi.org/10.1016/j.anaerobe.2017.01.002.
- Johansen, J, and R. Bakke. 2006. 'Enhancing Hydrolysis with Microaeration'. Water Science
   and Technology: A Journal of the International Association on Water Pollution Research 53
- 582 (February): 43–50. https://doi.org/10.2166/wst.2006.234.
- 583 Joss, A., S. Zabczynski, A. Göbel, B. Hoffmann, D. Löffler, C. S. McArdell, T. A. Ternes, A.
- Thomsen, and H. Siegrist. 2006. 'Biological Degradation of Pharmaceuticals in Municipal
  Wastewater Treatment: Proposing a Classification Scheme'. *Water Research* 40 (8): 1686–96.
  https://doi.org/10.1016/j.watres.2006.02.014.
- 587 Kent, J., and J. H. Tay. 2019. 'Treatment of 17 Alpha-Ethinylestradiol, 4-Nonylphenol, and
  588 Carbamazepine in Wastewater Using an Aerobic Granular Sludge Sequencing Batch Reactor'.
  589 Science of the Total Environment 652 (February): 1270–78.
  590 https://doi.org/10.1016/j.scitotenv.2018.10.301.
- 591 Kobayashi, Takuro, Yu-You Li, Kengo Kubota, Hideki Harada, Takeki Maeda, and Han-Qing
- 592 Yu. 2012. 'Characterization of Sulfide-Oxidizing Microbial Mats Developed inside a Full-
- 593 Scale Anaerobic Digester Employing Biological Desulfurization'. *Applied Microbiology and*
- 594 Biotechnology 93 (2): 847–57. https://doi.org/10.1007/s00253-011-3445-6.

- 595 Kümmerer, K. 2009. 'The Presence of Pharmaceuticals in the Environment Due to Human 596 Use--Present Knowledge and Future Challenges'. *Journal of Environmental Management* 90
- 597 (8): 2354–66. https://doi.org/10.1016/j.jenvman.2009.01.023.

Lakshminarasimman, N., O. Quinones, B. J. Vanderford, P. Campo-Moreno, E. V.
Dickenson, and D. C. McAvoy. 2018. 'Biotransformation and Sorption of Trace Organic
Compounds in Biological Nutrient Removal Treatment Systems'. *Science of the Total Environment* 640 (November): 62–72. https://doi.org/10.1016/j.scitotenv.2018.05.145.

- Lynd, L. R., P. J. Weimer, W. H. van Zyl, and I. S. Pretorius. 2002. 'Microbial Cellulose
  Utilization: Fundamentals and Biotechnology'. *Microbiology and Molecular Biology Reviews*
- 604 66 (3): 506–77. https://doi.org/10.1128/MMBR.66.3.506-577.2002.

Lynd, Lee R., Paul J. Weimer, Willem H. van Zyl, and Isak S. Pretorius. 2002. 'Microbial
Cellulose Utilization: Fundamentals and Biotechnology'. *Microbiology and Molecular Biology Reviews* 66 (3): 506–77. https://doi.org/10.1128/MMBR.66.3.506-577.2002.

Ma, Y., K. Zhang, C. Li, T. Zhang, and N. Gao. 2015. 'Oxidation of Sulfonamides in
Aqueous Solution by UV-TiO-Fe(VI)'. *BioMed Research International* 2015: 1–10.
https://doi.org/10.1155/2015/973942.

Malmborg, Jonas, and Jörgen Magnér. 2015. 'Pharmaceutical Residues in Sewage Sludge:
Effect of Sanitization and Anaerobic Digestion'. *Journal of Environmental Management* 153
(April): 1–10. https://doi.org/10.1016/j.jenvman.2015.01.041.

614 Martín, J., D. Camacho-Muñoz, J. L. Santos, I. Aparicio, and E. Alonso. 2012. 'Occurrence of Pharmaceutical Compounds in Wastewater and Sludge from Wastewater Treatment Plants: 615 Removal and Ecotoxicological Impact of Wastewater Discharges and Sludge Disposal'. 616 617 Journal of Hazardous Materials, Occurrence and fate of emerging contaminants in municipal 618 wastewater 239-240 (November): 40-47. treatment systems, 619 https://doi.org/10.1016/j.jhazmat.2012.04.068.

620 Martín, Julia, Juan Luis Santos, Irene Aparicio, and Esteban Alonso. 2015. 'Pharmaceutically 621 Active Compounds in Sludge Stabilization Treatments: Anaerobic and Aerobic Digestion, 622 Wastewater Stabilization Ponds and Composting'. Science of The Total Environment, 623 Towards a better understanding of the links between stressors, hazard assessment and 624 services under water scarcity, 503-504 (January): 97-104. ecosystem 625 https://doi.org/10.1016/j.scitotenv.2014.05.089.

Montalvo, S., C. Huiliñir, F. Ojeda, A. Castillo, L. Lillo, and L. Guerrero. 2016.
'Microaerobic Pretreatment of Sewage Sludge: Effect of Air Flow Rate, Pretreatment Time
and Temperature on the Aerobic Process and Methane Generation'. *International Biodeterioration* & *Biodegradation* 110 (May): 1–7.
https://doi.org/10.1016/j.ibiod.2016.01.010.

Narumiya, M., N. Nakada, N. Yamashita, and H. Tanaka. 2013. 'Phase Distribution and
Removal of Pharmaceuticals and Personal Care Products during Anaerobic Sludge Digestion'. *Journal of Hazardous Materials* 260 (September): 305–12.
https://doi.org/10.1016/j.jhazmat.2013.05.032.

- Narumiya, Masanori, Norihide Nakada, Naoyuki Yamashita, and Hiroaki Tanaka. 2013.
  'Phase Distribution and Removal of Pharmaceuticals and Personal Care Products during
  Anaerobic Sludge Digestion'. *Journal of Hazardous Materials* 260 (September): 305–12.
  https://doi.org/10.1016/j.jhazmat.2013.05.032.
- Nguyen, Duc Binh, and Samir Kumar Khanal. 2018. 'A Little Breath of Fresh Air into an
  Anaerobic System: How Microaeration Facilitates Anaerobic Digestion Process.' *Biotechnology Advances*. https://doi.org/10.1016/j.biotechadv.2018.08.007.
- Park, Sang Kyu, Hyun Min Jang, Jeong Hyub Ha, and Jong Moon Park. 2014. 'Sequential
  Sludge Digestion after Diverse Pre-Treatment Conditions: Sludge Removal, Methane
  Production and Microbial Community Changes'. *Bioresource Technology* 162 (June): 331–
  https://doi.org/10.1016/j.biortech.2014.03.152.
- Paul, E., and Y. Liu, eds. 2012. *Biological Sludge Minimization and Biomaterials/Bioenergy Recovery Technologies: Paul/Sludge Minimization*. Hoboken, NJ, USA: John Wiley & Sons,
  Inc. https://doi.org/10.1002/9781118309643.
- 649 Petrie, B., R. Barden, and B. Kasprzyk-Hordern. 2015. 'A Review on Emerging Contaminants 650 in Wastewaters and the Environment: Current Knowledge, Understudied Areas and 651 Recommendations for Future Monitoring'. *Water Research*, Occurrence, fate, removal and 652 assessment of emerging contaminants in water in the water cycle (from wastewater to 653 drinking water), 72 (April): 3–27. https://doi.org/10.1016/j.watres.2014.08.053.
- Phan, H. V., R. Wickham, S. Xie, J. A. McDonald, S. J. Khan, H. H. Ngo, W. Guo, and L. D.
  Nghiem. 2018. 'The Fate of Trace Organic Contaminants during Anaerobic Digestion of
  Primary Sludge: A Pilot Scale Study'. *Bioresource Technology* 256 (May): 384–90.
  https://doi.org/10.1016/j.biortech.2018.02.040.
- Radjenović, J., M. Petrović, and D. Barceló. 2009. 'Fate and Distribution of Pharmaceuticals
  in Wastewater and Sewage Sludge of the Conventional Activated Sludge (CAS) and
  Advanced Membrane Bioreactor (MBR) Treatment'. *Water Research* 43 (3): 831–41.
  https://doi.org/10.1016/j.watres.2008.11.043.
- Ramos, I., and M. Fdz-Polanco. 2013. 'The Potential of Oxygen to Improve the Stability of
  Anaerobic Reactors during Unbalanced Conditions: Results from a Pilot-Scale Digester
  Treating Sewage Sludge'. *Bioresource Technology* 140 (July): 80–85.
  https://doi.org/10.1016/j.biortech.2013.04.066.
- Samaras, V. G., A. S. Stasinakis, D. Mamais, N. S. Thomaidis, and T. D. Lekkas. 2013. 'Fate
  of Selected Pharmaceuticals and Synthetic Endocrine Disrupting Compounds during
  Wastewater Treatment and Sludge Anaerobic Digestion'. *Journal of Hazardous Materials*244–245 (January): 259–67. https://doi.org/10.1016/j.jhazmat.2012.11.039.
- 670 Siegrist, H., D. Vogt, J. L. Garcia-Heras, and W. Gujer. 2002. 'Mathematical Model for
  671 Meso- and Thermophilic Anaerobic Sewage Sludge Digestion'. *Environmental Science &*672 *Technology* 36 (5): 1113–23. https://doi.org/10.1021/es010139p.

Sperling, Marcos Von, Matthew E. Verbyla, and Silvia M. A. C. Oliveira. 2020. Assessment 673 of Treatment Plant Performance and Water Quality Data: A Guide for Students, Researchers

- 674
- 675 and Practitioners. IWA Publishing.

676 Stadler, L. B., L. Su, C. J. Moline, A. S. Ernstoff, D. S. Aga, and N. G. Love. 2015. 'Effect of 677 Redox Conditions on Pharmaceutical Loss during Biological Wastewater Treatment Using 678 Sequencing Batch Reactors'. Journal of Hazardous Materials, Advances in Analysis, 679 Treatment Technologies, and Environmental Fate of Emerging Contaminants, 282 (January): 680 106-15. https://doi.org/10.1016/j.jhazmat.2014.08.002.

- 681 Svahn, Ola, and Erland Björklund. 2015. 'Describing Sorption of Pharmaceuticals to Lake and River Sediments, and Sewage Sludge from UNESCO Biosphere Reserve Kristianstads 682 683 Vattenrike by Chromatographic Asymmetry Factors and Recovery Measurements'. Journal of
- 684 Chromatography A 1415 (October): 73-82. https://doi.org/10.1016/j.chroma.2015.08.061.
- 685 Ternes, T. A., N. Herrmann, M. Bonerz, T. Knacker, H. Siegrist, and A. Joss. 2004. 'A Rapid Method to Measure the Solid-Water Distribution Coefficient (Kd) for Pharmaceuticals and 686 687 Fragrances in Sewage Sludge'. Water Research 38 (19): 4075-84. Musk 688 https://doi.org/10.1016/j.watres.2004.07.015.
- 689 Urase, T., and T. Kikuta. 2005. 'Separate Estimation of Adsorption and Degradation of 690 Pharmaceutical Substances and Estrogens in the Activated Sludge Process'. Water Research 691 39 (7): 1289–1300. https://doi.org/10.1016/j.watres.2005.01.015.

692 Verlicchi, P., M. Al Aukidy, and E. Zambello. 2012. 'Occurrence of Pharmaceutical 693 Compounds in Urban Wastewater: Removal, Mass Load and Environmental Risk after a Secondary Treatment-A Review'. Science of The Total Environment, Special Section -694 695 Arsenic in Latin America, An Unrevealed Continent: Occurence, Health Effects and 696 Mitigation, 429 (July): 123–55. https://doi.org/10.1016/j.scitotenv.2012.04.028.

697 Xu, S., A. Selvam, and J. W. C. Wong. 2014. 'Optimization of Micro-Aeration Intensity in 698 Acidogenic Reactor of a Two-Phase Anaerobic Digester Treating Food Waste'. Waste 699 Management 34 (2): 363-69. https://doi.org/10.1016/j.wasman.2013.10.038.

700

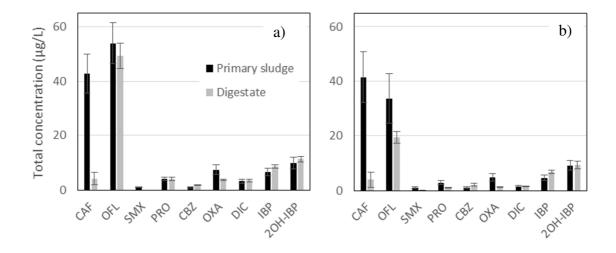


Figure 1. Concentration of targeted compounds in primary sludge and digestate in a) MAD (n=13); b) MAD-TAR (n=13)

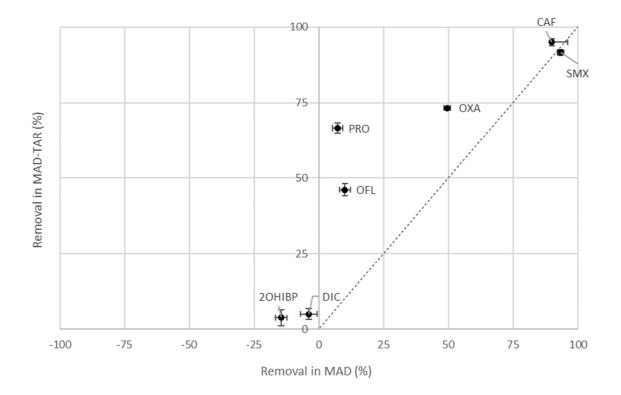


Figure 2. Comparison of compounds removal in conventional vs innovative process for biodegradable molecule. The error bars represent the 95% confidence interval.


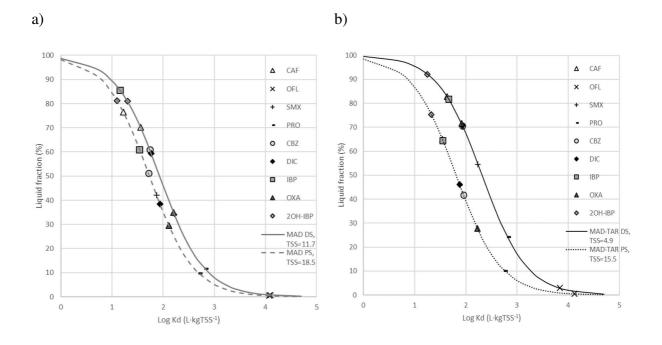


Figure 3. Logarithm of solid-liquid partition coefficient Kd (L·kgTSS<sup>-1</sup>) of target molecules in primary (PS) and digested (DS) sludge of MAD (a) and MAD-TAR (b) campaigns. Lines are calculated from eq. 1.

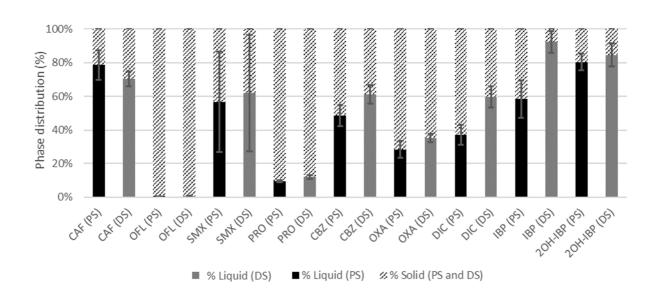

b)

a)

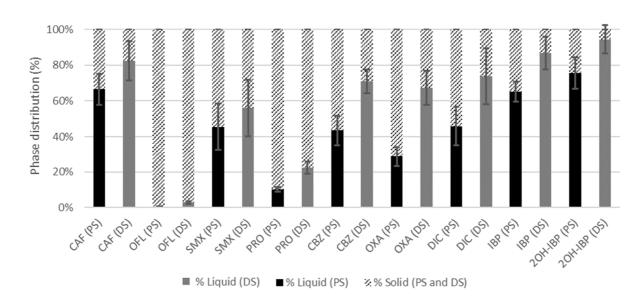


Figure 4. Distribution of the target compounds in particulate and liquid phases for primary (PS) and digested (DS) sludge: a) MAD b) MAD-TAR.

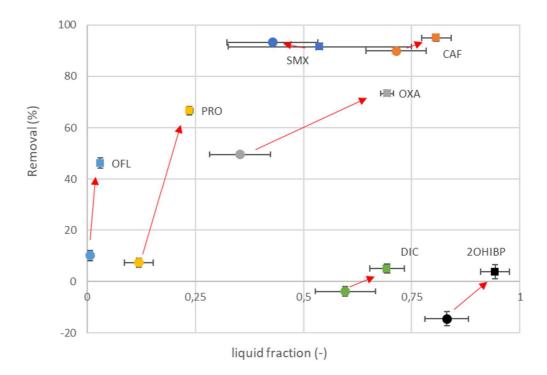


Figure 5. Removal efficiencies versus fraction in liquid phase for MAD (●) and MAD-TAR (■) for biodegradable compounds. The error bars represent the 95% confidence interval.

	CAF	OFL	SMX	PRO	CBZ	DIC	IBP
			2.6 <sup>b)</sup>		2.4 <sup>c)</sup>	2.7 <sup>b)</sup>	
<b>. .</b> .		$-2.0^{a}$ 3.0 - 3.5 <sup>a</sup> 1.8 - 2.6 <sup>a</sup> 2.21-3.0		1.7 - 2.0 <sup>a)</sup>	2.3 - 3.1 <sup>a)</sup>		
Log K <sub>d</sub>	$1.4 - 2.0^{a}$	3.0 - 3.5 *			2.04 - 2.71 <sup>c)</sup>	1.77 - 2.51 <sup>c)</sup>	0.8 - 1.1 <sup>c)</sup>
			0.50 - 0.89 <sup>c)</sup>				2.7 <sup>d)</sup>

a) Narumiya et al. (2013) b) Carballa et al. (2008) c) Radjenović et al. (2009) d) Ternes et al. (2004)

Table 1 Main characteristics of MAD and MADTAR digestion.

	MAD	MAD-TAR
Operational conditions		
OLR (kgCOD m <sup>-3</sup> day <sup>-1</sup> )	1.2	0.9
OLR (kgVSS m <sup>-3</sup> day <sup>-1</sup> )	0.8	0.6
SRT (days)	19.6	22.4
Temperature (°C)	35	35 (MAD), 60 (TAR)
Primary sludge		
TSS (g L <sup>-1</sup> )	18.5 ± 3.5	15.5± 2.1
VSS (g L <sup>-1</sup> )	$15.1 \pm 2.9$	12.9± 1.7
COD <sub>t</sub> (g L <sup>-1</sup> )	$24.2 \pm 4.6$	$20.2 \pm 4.6$
COD <sub>s</sub> (g L <sup>-1</sup> )	$0.63 \pm 0.12$	$0.45 \pm 0.15$
рН	$6.1 \pm 0.1$	$6.2 \pm 0.1$
Reactor		
TSS (g L <sup>-1</sup> )	$11.7 \pm 0.5$	$4.9 \pm 0.6$
VSS (g L <sup>-1</sup> )	$8.3 \pm 0.4$	$3.4 \pm 0.4$
COD <sub>t</sub> (g L <sup>-1</sup> )	$14.1 \pm 1.4$	$5.7 \pm 0.8$
COD <sub>s</sub> (g L <sup>-1</sup> )	$0.37 \pm 0.06$	$0.36 \pm 0.08$
рН	$7.5 \pm 0.1$	$7.4 \pm 0.1$
Removal efficiencies (%)		
COD	46.7	72.9
VSS	47.0	75.7
Biogas production	151	186
(NL CH <sub>4</sub> Kg <sup>-1</sup> COD <sub>fed</sub> )		
Average methane concentration (%)	57.4 %	56.3 %

